

# ICI-DP HH1000-15 set

**NEW**



## Delivery content

- |                     |                       |
|---------------------|-----------------------|
| 1x ICI-DP HH1000-15 | 1x BPS 204            |
| 1x BPS 204-Client   | 1x HV FI-FI 1 m, 高压电缆 |
| 1x SK FI-FI 7P 1 m  | 4x SMA-SSMB 1 m       |
| 1x NT FRI EU 24V    | 1x USB-AB             |
| 1x ICI-DP case      | 1x ICI-DP m           |
| 1x BPS 204 m        |                       |

## Technical parameters


探头尺寸	Ø 1000 µm
脉冲参数	
上升时间	2 ns
	25 ns (200 V)
极性 (set by software)	+/-
电压	50 - 1000 V
max. Jitter (typ.)	± 1 ns
Min. trigger pulse delay	35 ns

# ICI-DP HH1000-15 set

Contents of the case ICI-DP HH1000-15 set




Schematic set-up with mover

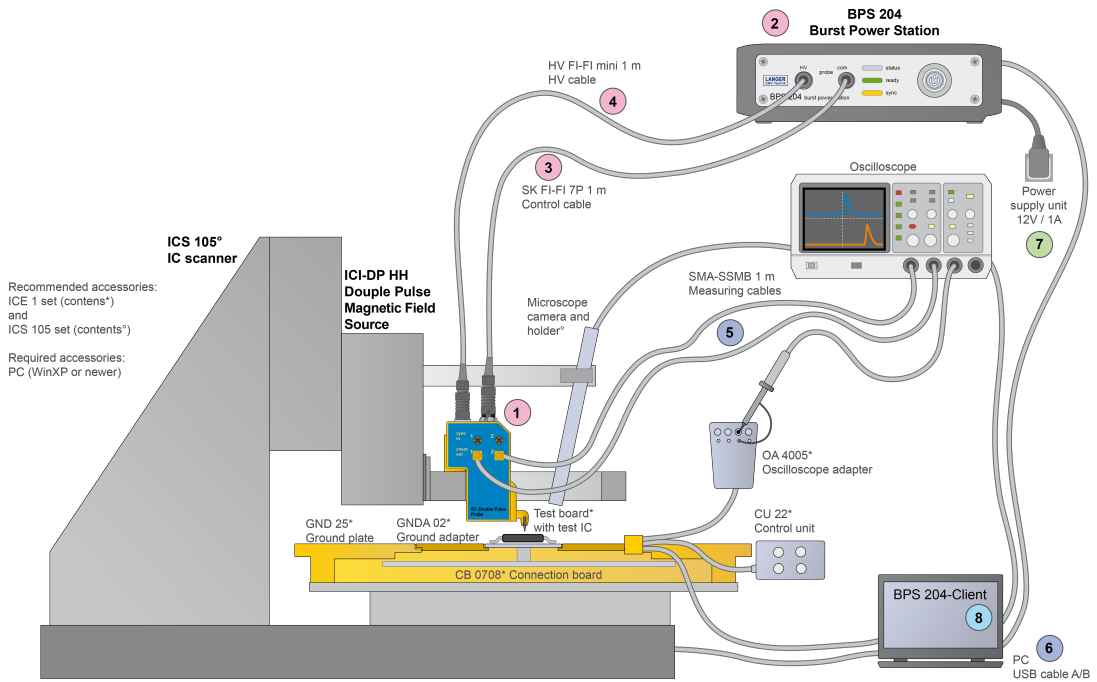

# ICI-DP HH1000-15 set

Fault injection measuring station with Langer IC scanner

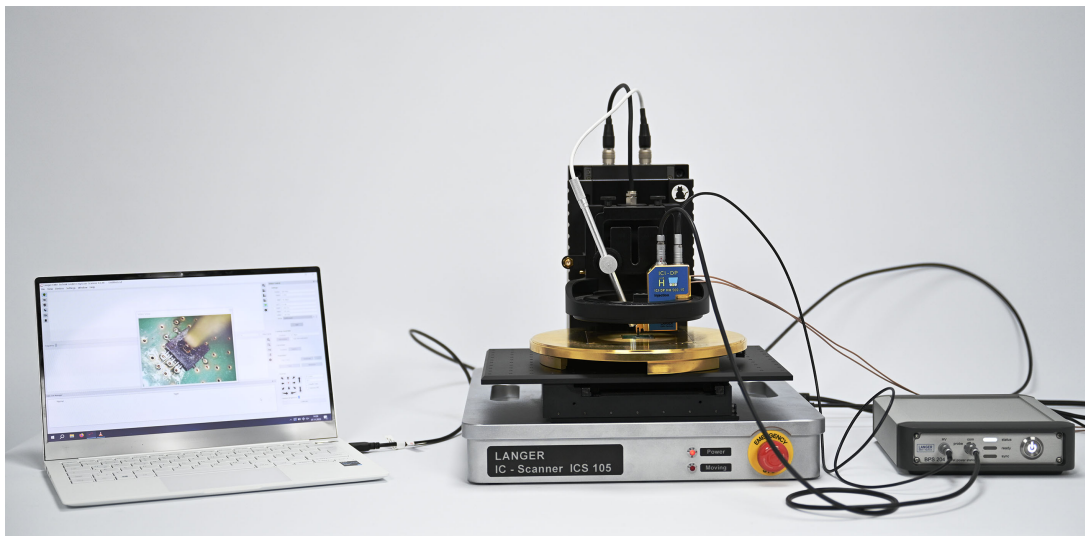

Scope of delivery

