


# XF-U 2.5-1

磁场探头 (30MHz-6GHz)

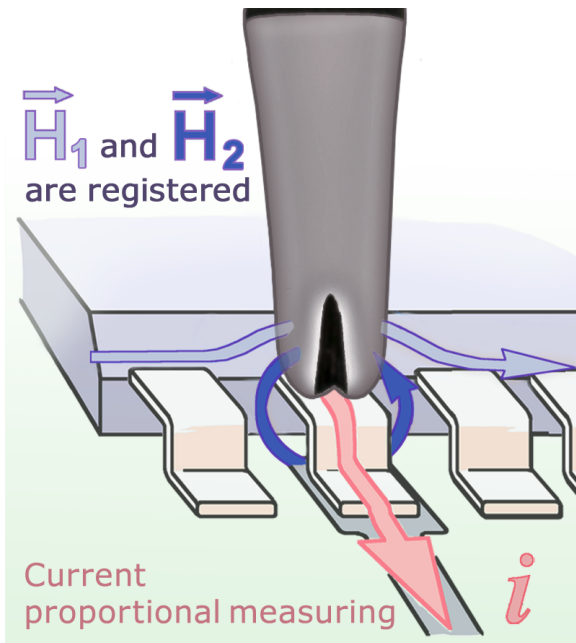

## Short description

XF-U 2.5-1型磁场探头是一个近场探头，用于选择性测量导线、SMD组件和IC引脚中的高频电流。这个探头有一个大约0.5mm宽的磁场敏感缺口，测量时将这个缺口放在布线、IC或者电容器的连接点上。

The XF-U 2.5-2 is a passive near-field probe that is designed for SMD components (pins). The near-field probe is small and handy. It has a current attenuating sheath and, therefore, is electrically shielded. It can be connected to a spectrum analyzer or an oscilloscope with a 50  $\Omega$  input. The H-field probe has an internal terminating resistance.

## Technical parameters

频率范围	30 MHz ... 6 GHz
分辨率	$\approx 0.5$ mm
探头尺寸	$\varnothing \approx 4$ mm
输出接口	SMA, female, jack
重量	15 g

# XF-U 2.5-1

磁场探头 (30MHz-6GHz)

频率特性 [dB $\mu$ V] / [dB $\mu$ A/m]




磁场校正曲线 [dB $\mu$ A/m] / [dB $\mu$ V]



# XF-U 2.5-1

磁场探头 (30MHz-6GHz)

电流校正曲线 [dB $\mu$ A] / [dB $\mu$ V]

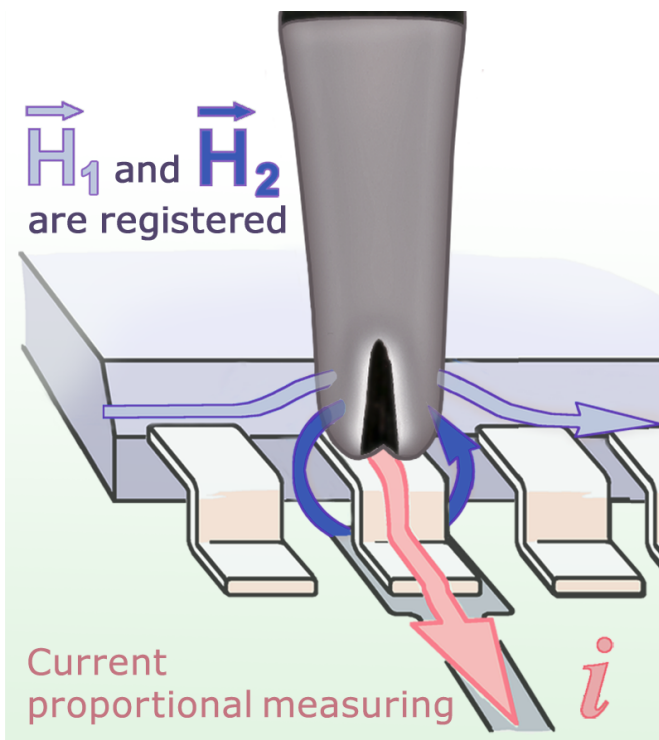

# XF-U 2.5-1

磁场探头 (30MHz-6GHz)

Probe head

