


### Short description

The BS 05DU generates a magnetic field in millimeter range. It functions like a coupling clamp and is used for selective coupling of disturbance current in single conducting paths, IC pins, SMD components and thin cables (flat ribbon cables).

### Measuring principles

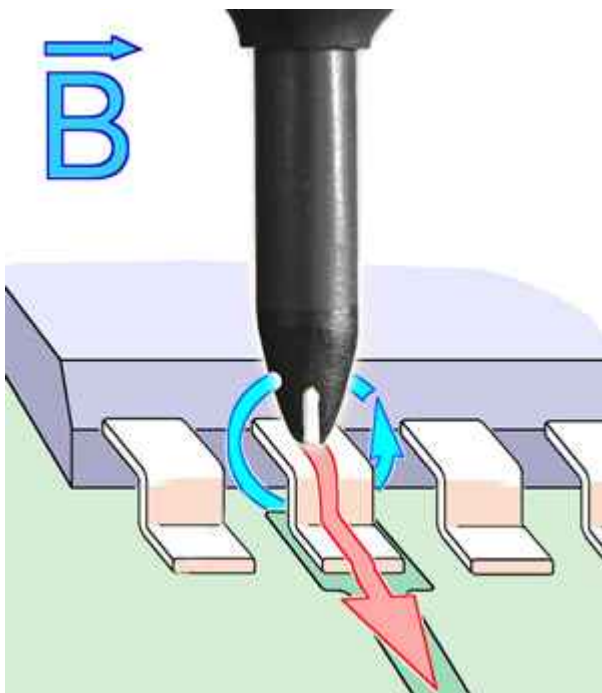

# BS 05DU

Magnetic Field Source

## Application BS 05DU

